Power your life LONG

Valve Regulated Lead Acid Battery

WP30-12TN

Specifications

Nominal Voltage(V)

12V

Nominal Capacity

20 hour rate	(1.5A	to	10.50V)	30Ah
10 hour rate	(2.85A	to	10.50V)	28.5Ah
5 hour rate	(5.1A	to	10.20V)	25.5Ah
1 C	(30A	to	9.60V)	17Ah
3 C	(90A	to	9.60V)	12Ah

Weight

Approx. 9.3kg(20.5Lbs.)

Internal Resistance (at 1KHz)

Approx. 9.4 mΩ

Maximum Discharge Current for

5 seconds: 450A

Charging Methods at 25℃(77℉)

Cycle use:

Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/℃/cell	
Maximum Charging Current：	9A

Standby use:

Float Charging Voltage	13.5 to 13.8V
Coefficient -3.0mV/℃/cell	

Operating Temperature Range

Charge	-15℃(5℉)	to	40℃(104℉)
Discharge	-15℃(5℉)	to	50℃(122℉)
Storage	-15℃(5℉)	to	40℃(104℉)

Charge Retention (shelf life) at 20℃(68℉)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Design Life

EUROBAT(20℃): 3-5 YEARS STANDARD COMMERCIAL

Terminal

F6

Dimensions

Length (L)	$166\pm^{2}_{1}(6.54\pm^{0.08}_{0.04})$
Width (W)	$125.5\pm^{2}_{1}(4.94\pm^{0.08}_{0.04})$
Height (H)	$176\pm^{2}_{1}(6.93\pm^{0.08}_{0.04})$
Overall Height (HT)	$176\pm^{2}_{1}(6.93\pm^{0.08}_{0.04})$

Description of torque value of hardware for the terminals:

Recommended torque value M5:4 N-m (41 kgf-cm)

Maximum allowable torque value M5:6 N-m (61 kgf-cm)

mm(inch)





(M5 Bolt)
F6

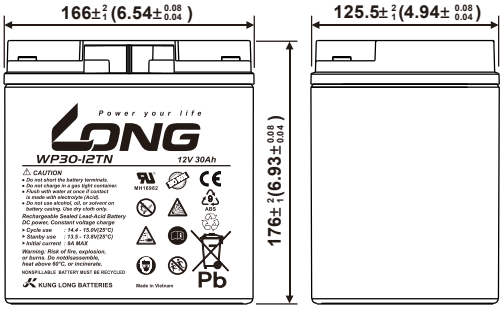

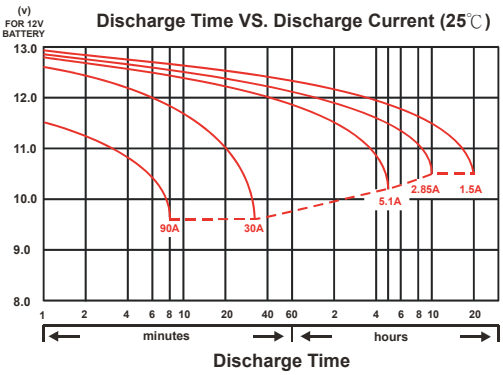

Power your life

Valve Regulated Lead Acid Battery

WP30-12TN

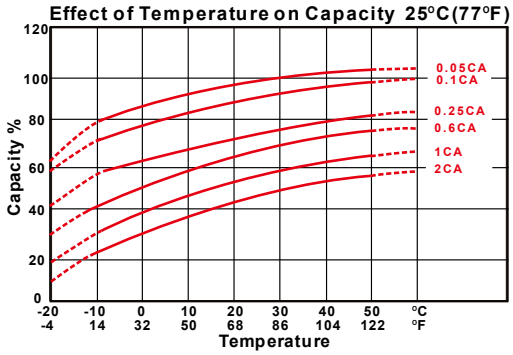

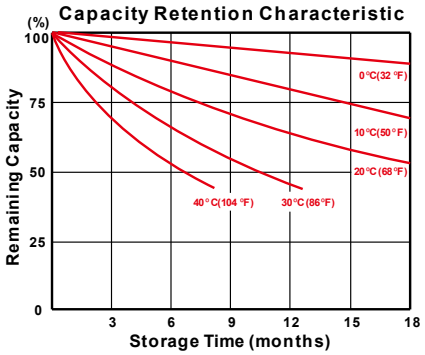

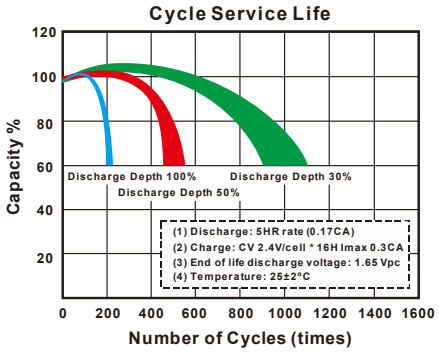

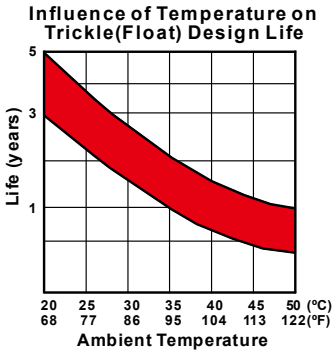

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25℃(77℉)

Time \ End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	141	177	198	209	213	217	222
10	min	108	124	135	142	146	149	153
15	min	94.4	105	110	114	116	117	119
30	min	58.4	63.1	65.0	66.5	66.8	67.4	68.1
60	min	34.4	37.1	38.5	39.5	39.8	40.4	40.9
120	min	20.3	21.7	22.5	23.2	23.3	23.7	24.0
180	min	15.5	16.1	16.4	16.7	16.8	17.0	17.2
240	min	12.7	13.2	13.5	13.7	13.7	13.8	14.0
300	min	10.4	10.9	11.1	12.1	11.3	11.4	11.5
600	min	5.81	6.02	6.17	6.30	6.33	6.39	6.45
1200	min	3.13	3.26	3.33	3.38	3.40	3.44	3.47

- Discharge Rates in Amperes to Various End Voltages at 25℃(77℉)

Time \ End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	75.3	96.7	110	118	121	124	128
10	min	56.4	65.5	71.8	77.0	78.8	81.0	83.4
15	min	48.6	54.4	57.1	59.7	60.6	61.4	62.7
30	min	29.3	31.8	32.9	33.8	34.1	34.5	34.9
60	min	16.9	18.3	19.2	19.8	20.0	20.2	20.4
120	min	10.4	10.9	11.3	11.6	11.7	11.8	11.9
180	min	7.51	7.83	8.04	8.21	8.28	8.35	8.46
240	min	6.12	6.41	6.54	6.66	6.70	6.74	6.81
300	min	5.09	5.34	5.46	5.55	5.59	5.63	5.68
600	min	2.81	2.92	3.00	3.06	3.08	3.11	3.14
1200	min	1.52	1.57	1.61	1.64	1.65	1.67	1.69

All data on the spec. sheet is an average value:
The tolerance range : X<6min(+15%~-15%), 6min≦X<10min(+12%~-12%),10min ≦X < 60min(+8% ~-8%), X≧60min(+5%~-5%)

260626-1F

廣隆光電科技股份有限公司
KUNG LONG BATTERIES INDUSTRIAL CO., LTD.

Head Quarter Service TEL: +886-49-2254-777 FAX: +886-49-2255-139 E-mail: sales@mail.klb.com.tw
USA Customer Service TEL: +1-949-328-7936 FAX: +1-949-266-9917 E-mail: sales@kunglong.com
Vietnam Customer Service TEL: +84-272-3779666 FAX: +84-272-3779476 E-mail: sales@mail.klb.com.tw

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.