

Specifications

Nominal Voltage(V)

6V

Nominal Capacity

20 hour rate	(0.25A to 5.25V)	5Ah
10 hour rate	(0.475A to 5.25V)	4.75Ah
5 hour rate	(0.85A to 5.1V)	4.25Ah
1 C	(5A to 4.8V)	2.83Ah
3 C	(15A to 4.8V)	2Ah

Weight

Approx. 890g(1.96Lbs.)

Internal Resistance (at 1KHz)

Approx. 19 mΩ

Maximum Discharge Current for

5 seconds: 75A

Charging Methods at 25°C(77°F)

Cycle use:	7.20 to 7.50V
Charging Voltage	
Coefficient -5.0mV/°C/cell	
Maximum Charging Current :	1.5A
Standby use:	
Float Charging Voltage	6.75 to 6.90V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB
Option: Flammability resistance of (UL94 V-0)

Design Life

3-5 Years.



Terminal

F1 or F2 (Faston Tab 187 or 250)




Dimensions


Length (L)	70±1 (2.76±0.04)
Width (W)	47±1 (1.85±0.04)
Height (H)	102±1 (4.02±0.04)
Overall Height (HT)	106±1 (4.17±0.04)

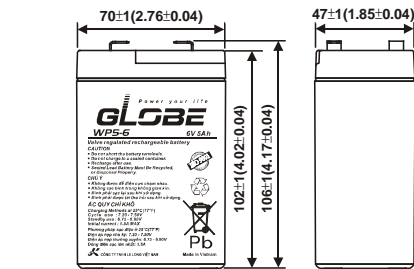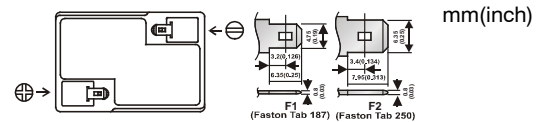


(V) FOR 6V BATTERY Discharge Time VS. Discharge Current (25°C)

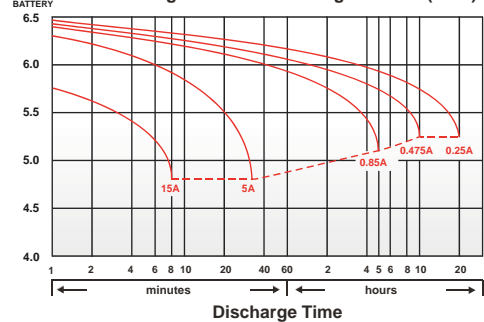


Effect of Temperature on Capacity 25°C(77°F)

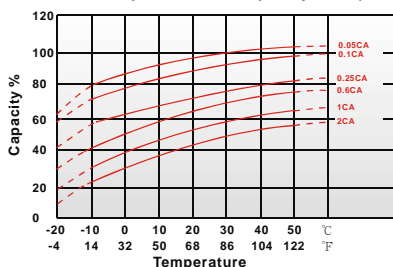


Capacity Retention Characteristic



Cycle Service Life



Trickle (or float) Service Life



120424-1F-V